

I/P® Brushless Process Drives

Powerful, low-maintenance drives keep you pumping

- Don't worry about moisture, chemicals, or dust—IP55-rated nonchip epoxy-coated steel housing
- Goes where you need it—compact and light enough to carry with one hand, powerful enough to drive two pump heads
- Get up to speed quickly—easy to adjust speed knob and LED display for improved repeatability
- Model 77411-00 offers remote control of speed, direction, and start/stop

What's included: 6-ft (1.8-m) line cord with IEC320/CEE 22 connector coupler. Please specify final destination country to receive the correct plug/cord set.

FEATURES

- ✓ Flow rates: 0.2 to 19 LPM
- ✓ Accuracy of $\pm 0.25\%$ speed control
- ✓ LED display
- ✓ Reversible maintenance-free, brushless motor
- ✓ Accept up to 2 pump heads



ISO9001:2008
CERTIFIED SUPPLIER



rpm	Speed control (repeatability)	Pump heads accepted	Motor size	IP rating	Dimensions (L x W x H)	Power (50/60 Hz)		Catalog number	Price
						VAC	Amps		
Variable-speed brushless process drive									
33 to 650	±0.25% (2% of max rpm)	2	⅓ hp (0.25 kW)	IP55	14"L x 10"W x 9"H (35.6 x 25.4 x 22.9 cm)	90 to 260	4.5 at 115 VAC, 2.6 at 230 VAC	GY-77410-10	
Variable-speed brushless process drive with remote input/output									
33 to 650	±0.25% (2% of max rpm)	2	⅓ hp (0.25 kW)	IP55	14"L x 10"W x 9"H (35.6 x 25.4 x 22.9 cm)	90 to 260	4.5 at 115 VAC, 2.6 at 230 VAC	GY-77411-00	

Accessories

[GY-07595-43](#) Washdown foot switch for model 77411-00


[GY-77300-32](#) Remote cable kit. Required for model 77411-00 to operate the remote inputs and outputs

Wait!

There's More at
[ColeParmer.com](#)

Find all the
product specs
you need!

Choose a Complete System
One catalog number includes all 3!

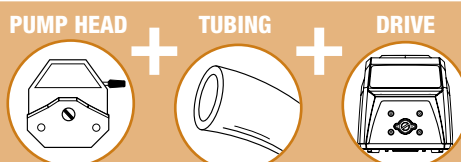

System	Flow range	What's included			Power	Catalog number	Price
		Pump head	Tubing	Drive			
	0.4 to 8 LPM	Easy-Load® 77602-10	C-Flex® ULTRA I/P 73 tubing 06434-73 10 ft (3 m)	Brushless process drive 77410-10 33 to 650 rpm	90 to 260 VAC, 50/60 Hz	GY-77963-10	
				Brushless process drive with remote I/O 77411-00 33 to 650 rpm		GY-77965-00	
	0.7 to 17 LPM	High-Performance 77600-62	Tygon® E-LFL I/P 88 tubing 06440-88 3 ft (1 m)	Brushless process drive 77410-10 33 to 650 rpm	90 to 260 VAC, 50/60 Hz	GY-77963-20	
				Brushless process drive with remote I/O 77411-00 33 to 650 rpm		GY-77965-10	