


# Electric Models

Wisconsin Aluminum Foundry was first in the field to develop an immersion-type pressure sterilizer for physicians' offices, hospitals and laboratories. The electric ALL-AMERICAN® Sterilizer is a complete, self-contained unit with an immersion heating element, automatic thermostatic control, automatic release valve, and pilot light. It connects to any outlet, is ready for use instantly, and ensures complete, efficient sterilization.

- Available in 120V or 240V
- Operational on 50Hz or 60Hz
- Calrod immersion heating element
- 3-wire grounded cord and plug for safety
- Optional support bases elevate electric sterilizers above table or counter surface to prevent heat damage
- UL approved
- One year warranty
- Units include aluminum inner container with rack
- Interior stainless steel support stand
- Made in U.S.A.

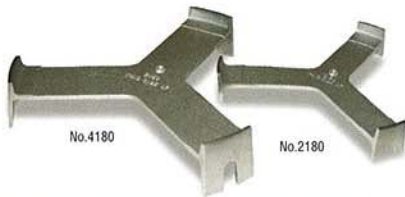

**Note:** Optional support base elevates electric sterilizers to prevent heat from damaging counter top or work surface.

## 25X Features:

- Our most economical electrical unit
- Fenwal thermostat control and pilot light
- 120 or 240 volt operation
- 1050 watt heating element
- 25 qt/24 liter capacity

## 50X Features:

- 1650 watt heating element for faster start-up, 50% faster than 25X
- 36% greater heating capability compared to 25X
- More accurate TPI thermocouple, snapswitch and pilot light
- 60 minute mechanical bell timer
- 120 or 240 volt operation
- 25 qt/24 liter capacity

## 75X Features:

- 64% greater capacity compared to 25X
- 120 or 240 volt operation
- 1650 watt heating element for faster operation
- More accurate TPI thermocouple, snapswitch and pilot light
- 60 minute mechanical bell timer
- Extra large 41 qt/39 liter capacity

## SPECIFICATIONS

Shown with optional support stands.



### Model 25X (25 qt/24 liter)

<b>Model 25X-120:</b> 120 Volt, 50/60 Hz 1050 watts/8.75 amps	
<b>Model 25X-240:</b> 240 Volt, 50/60 Hz 1050 watts/4.38 amps	
<b>Gross Capacity</b>	<b>25 qt / 24 liter</b>
Overall Height	16 <sup>3</sup> / <sub>4</sub> " / 42.5cm
Bottom Height	12 <sup>1</sup> / <sub>4</sub> " / 31.2cm
Inside Diameter	12 <sup>5</sup> / <sub>8</sub> " / 32.1cm
Unit Weight	26 lbs. / 11.8kg.
<b>Inner Container No. 2156</b>	
Height	8 <sup>1</sup> / <sub>2</sub> " / 21.6cm
Diameter	11 <sup>1</sup> / <sub>8</sub> " / 28.3cm
Circumference	35 <sup>5</sup> / <sub>8</sub> " / 91.1cm
Capacity	14.5 qt / 13.7 liter
Volume	835in <sup>3</sup> / 13,688cm <sup>3</sup>
Carton Dimensions	19 <sup>1</sup> / <sub>2</sub> " x 17 <sup>1</sup> / <sub>2</sub> " x 19"
	56.5cm x 44.5cm x 48.3cm
Shipping Weight	30 lb. / 13.6kg.
Unit Pack: 1	Cube: 3.75
<b>Optional No. 2180 Support Base</b>	
Outside Diameter	2" / 5cm high
Inside Diameter	12 <sup>3</sup> / <sub>4</sub> " / 32.4cm
Elevates Sterilizer Above Surface	12 <sup>3</sup> / <sub>8</sub> " / 31.4cm
	13 <sup>1</sup> / <sub>8</sub> " / 3.5cm

### Model 50X (25 qt/24 liter)

<b>Model 50X-120:</b> 120 Volt, 50/60 Hz 1650 watts/13.75 amps	
<b>Model 50X-240:</b> 240 Volt, 50/60 Hz 1650 watts/6.88 amps	
<b>Gross Capacity</b>	<b>25 qt / 24 liter</b>
Overall Height	16 <sup>3</sup> / <sub>4</sub> " / 42.5cm
Bottom Height	12 <sup>1</sup> / <sub>4</sub> " / 31.2cm
Inside Diameter	12 <sup>5</sup> / <sub>8</sub> " / 32.1cm
Unit Weight	29 lbs. / 13.2kg.
<b>Inner Container No. 2156</b>	
Height	8 <sup>1</sup> / <sub>2</sub> " / 21.6cm
Diameter	11 <sup>1</sup> / <sub>8</sub> " / 28.3cm
Circumference	35 <sup>5</sup> / <sub>8</sub> " / 91.1cm
Capacity	14.5 qt / 13.7 liter
Volume	835in <sup>3</sup> / 13,688cm <sup>3</sup>
Carton Dimensions	22 <sup>1</sup> / <sub>4</sub> " x 17 <sup>1</sup> / <sub>2</sub> " x 19"
	56.5cm x 44.5cm x 48.3cm
Shipping Weight	34 lb./15.4kg.
Unit Pack: 1	Cube: 4.28
<b>Optional No. 2180 Support Base</b>	
Outside Diameter	2" / 5cm high
Inside Diameter	12 <sup>3</sup> / <sub>4</sub> " / 32.4cm
Elevates Sterilizer Above Surface	12 <sup>3</sup> / <sub>8</sub> " / 31.4cm
	13 <sup>1</sup> / <sub>8</sub> " / 3.5cm

### Model 75X (41 qt/39 liter)

<b>Model 75X-120:</b> 120 Volt, 50/60 Hz 1650 watts/13.75 amps	
<b>Model 75X-240:</b> 240 Volt, 50/60 Hz 1650 watts/6.88 amps	
<b>Gross Capacity</b>	<b>41 qt / 39 liter</b>
Overall Height	19" / 48.3cm
Bottom Height	14 <sup>1</sup> / <sub>4</sub> " / 36.2cm
Inside Diameter	15 <sup>1</sup> / <sub>4</sub> " / 38.7cm
Unit Weight	45 lbs. / 20.4kg.
<b>Inner Container No. 4156</b>	
Height	10 <sup>1</sup> / <sub>4</sub> " / 26cm
Diameter	14" / 35.6cm
Circumference	44 <sup>1</sup> / <sub>2</sub> " / 113cm
Capacity	27.3 qt / 25.8 liter
Volume	1578in <sup>3</sup> / 25,856cm <sup>3</sup>
Carton Dimensions	24" x 24" x 21"
	61cm x 61cm x 53.3cm
Shipping Weight	51 lb. / 23.1kg.
Unit Pack: 1	Cube: 7
<b>Optional No. 4180 Support Base</b>	
Outside Diameter	3" / 7.6cm high
Inside Diameter	16 <sup>1</sup> / <sub>4</sub> " / 41.3cm
Elevates Sterilizer Above Surface	15" / 38.1cm
	2 <sup>1</sup> / <sub>4</sub> " / 5.7cm