




Multi-channel small flow Pump Head

DG Series

Max. Flow Rate



PUMP HEADS

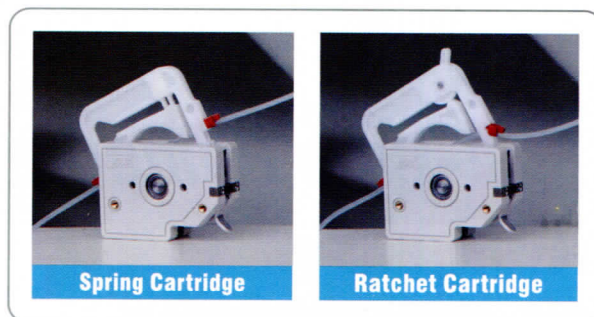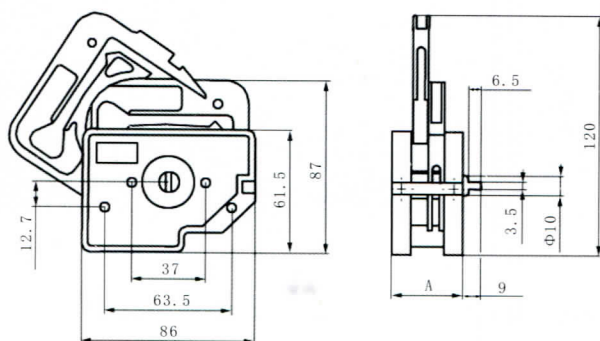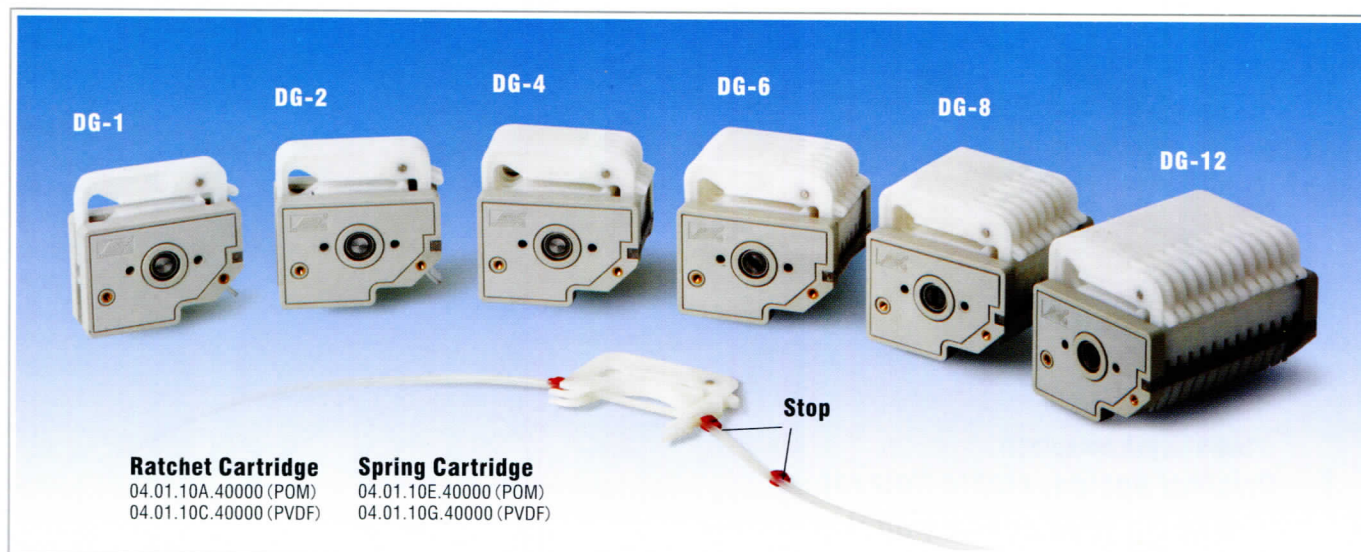

Discrete cartridge, special tubing sets, trigger structure of DG-1&DG-2.

Spring cartridge can adjust the occlusion automatically to accept several different tubing wall thicknesses.

Ratchet cartridge can adjust the occlusion by adjusting ratchet position to accept several different tubing wall thicknesses.

Model	Roller Number	Product Code	Cartridge Type	Roller Material	Cartridge Material	Channel Number	Speed (rpm)	Tubing	Max. Flow Rate (mL/min)	Weight (kg)
DG-1-A/C	6	05.01.10A/C	Ratchet	Stainless Steel	DG-* -A/B cartridge material is POM 04.01.10A.40000	1	≤100	ID≤3.17mm Wall Thickness 0.8mm-1.0mm	48 (Single Channel)	0.20
DG-1-B/D	10	05.01.10B/D	Spring						32 (Single Channel)	0.21
DG-1-E/G	6	05.01.10E/G							48 (Single Channel)	0.20
DG-1-F/H	10	05.01.10F/H							32 (Single Channel)	0.21
DG-2-A/C	6	05.01.11A/C				Ratchet			2	48 (Single Channel)
DG-2-B/D	10	05.01.11B/D	32 (Single Channel)			0.27				
DG-2-E/G	6	05.01.11E/G	Spring			48 (Single Channel)				0.26
DG-2-F/H	10	05.01.11F/H				32 (Single Channel)				0.27
DG-4-A/C	6	05.01.12A/C	Ratchet		DG-* -C/D cartridge material is PVDF 04.01.10C.40000	4			48 (Single Channel)	0.39
DG-4-B/D	10	05.01.12B/D	32 (Single Channel)						0.40	
DG-4-E/G	6	05.01.12E/G	Spring						48 (Single Channel)	0.39
DG-4-F/H	10	05.01.12F/H							32 (Single Channel)	0.40
DG-6-A/C	6	05.01.13A/C	Ratchet		DG-* -E/F cartridge material is POM 04.01.10E.40000	6			48 (Single Channel)	0.51
DG-6-B/D	10	05.01.13B/D	32 (Single Channel)						0.54	
DG-6-E/G	6	05.01.13E/G	Spring						48 (Single Channel)	0.51
DG-6-F/H	10	05.01.13F/H							32 (Single Channel)	0.54
DG-8-A/C	6	05.01.14A/C	Ratchet		DG-* -G/H cartridge material is PVDF 04.01.10G.40000	8			48 (Single Channel)	0.63
DG-8-B/D	10	05.01.14B/D	32 (Single Channel)						0.67	
DG-8-E/G	6	05.01.14E/G	Spring						48 (Single Channel)	0.63
DG-8-F/H	10	05.01.14F/H							32 (Single Channel)	0.67
DG-12-A/C	6	05.01.15A/C	Ratchet		(* is 1,2,4,6,8,12)	12			48 (Single Channel)	0.88
DG-12-B/D	10	05.01.15B/D	32 (Single Channel)						0.95	
DG-12-E/G	6	05.01.15E/G	Spring						48 (Single Channel)	0.88
DG-12-F/H	10	05.01.15F/H							32 (Single Channel)	0.95