



Quick-load Pump Head



KZ25



For continuous tubing




For tubing with fittings


Big flow rate up to 6000 mL/min, easy to load tubing with separated structure.

Two tubing retention modes

- Continuous tubing
- Tubing with fittings

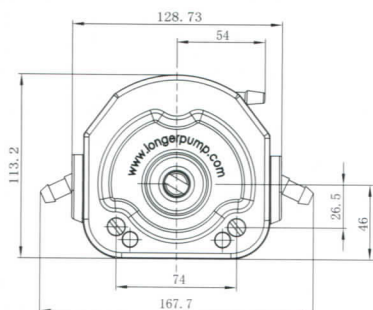

Short Shaft $\phi 15 \times 8.25$
Long Shaft $\phi 12 \times 12.3$

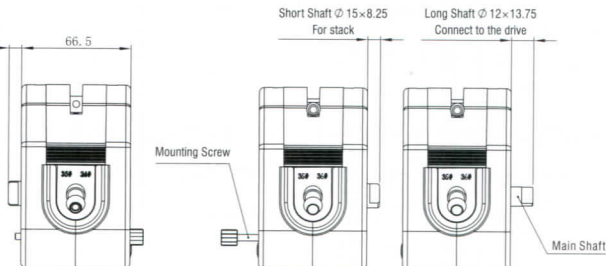

Model	Shaft	Product Code	Roller Number	Roller Material	Compression Block Material	Speed (rpm)	Tubing	Max. Flow Rate (mL/min)	Weight (kg)
KZ25-13-A	Long	05.01.25A	3	Stainless Steel	PPS	≤ 600	15" 24" 35" 36"	6000	0.79
KZ25-13-B	Short	05.01.25B							